

## JS-2 Series



### Introduction

JS-2 Series Interconnect box integrates the box body and various interfaces to provide an orderly, simple and compact conference connection solution. It uses pneumatic movement and mechanical latching mechanism to conceal the interfaces, such as for the power supply, network, phone, video, audio, PC video, switchboard, USB and so on, for the users to power the device and connect the signals. Open, press the top panel slightly, the panel of the Interconnect box will automatically prop up at 45° and various interfaces are shown up before the users. Close, press the top panel slightly, the Interconnect box will automatically retract to level with the table surface after retracted.

### Product Features

- When open, the panel of the interconnect box will be automatically propped up at 45°;
- Durable pneumatic movement and mechanical latching mechanism;
- RJ-45 interface should be used in network, data, phone connector (CAT.5/CAT.6);
- Bottom: 1.7m cable (U-type support) or 26cm cable (with box)
- Top surface available in brushed black or silver finishes, custom finishes is accepted;
- Various combination of interface, fit for big and medium size conference room, executive desks.


CCC Certificate Number: 2013010201596383

CE Certificate Number: N° VTUPV-269/2011ZAHR


ROHS Certificate Number: W02171017304C

### Main Specifications

Model	JS-2
Table Thickness	Maximal 60mm, 125mm(to be connected to extended part)
Temp. range	0 ~ 50°C (Non-condensing)
Weight	About 1.3kg~1.5kg
Dimensions	Panel: 157mm*131mm R=16mm Cutout Dimension: 148mm*122mm R=12mm Package: 200mm*170mm*200mm

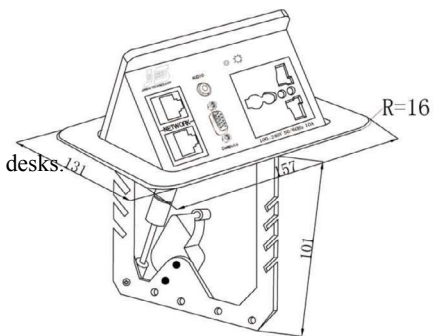

Overall Dimension ( mm )

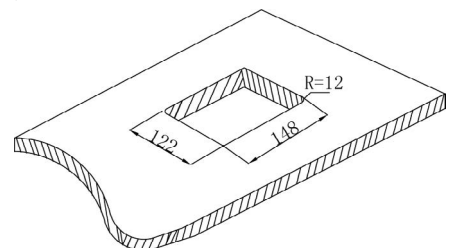

Cutout Dimension ( mm )



Open



Black Panel



U-type Support



Closed



Silver Panel



With Box

### AC OUTLET OPTIONS



Universal



China



UK



2-Pin Europe



France



US



Australia



SA



### JS-220

Universal AC Outlet

Computer Video

Stereo Audio

Network

\*1 (Can be replaced by US,UK,FR,2-Pin Europe AU, SA power outlet.)

\*1 VGA 15-Pin HD

\*1 3.5mm audio

\*2 (RJ45 (CAT.5/CAT.6)/ RJ11)



### JS-220H

Universal AC Outlet

Computer Video

Stereo Audio

Network

HDMI

\*1 (Can be replaced by US,UK,FR,2-Pin Europe AU, SA power outlet.)

\*1 VGA 15-Pin HD

\*1 3.5mm audio

\*2 (RJ45 (CAT.5/CAT.6)/ RJ11)

\*1 Version 1.4